


SEPARATING BELT



TOP characteristics

- Outstanding non-stick property
- Extremely gentle on products
- Suitable for handling very small products
- Approved for use in food processing in accordance with LFGB / BfR

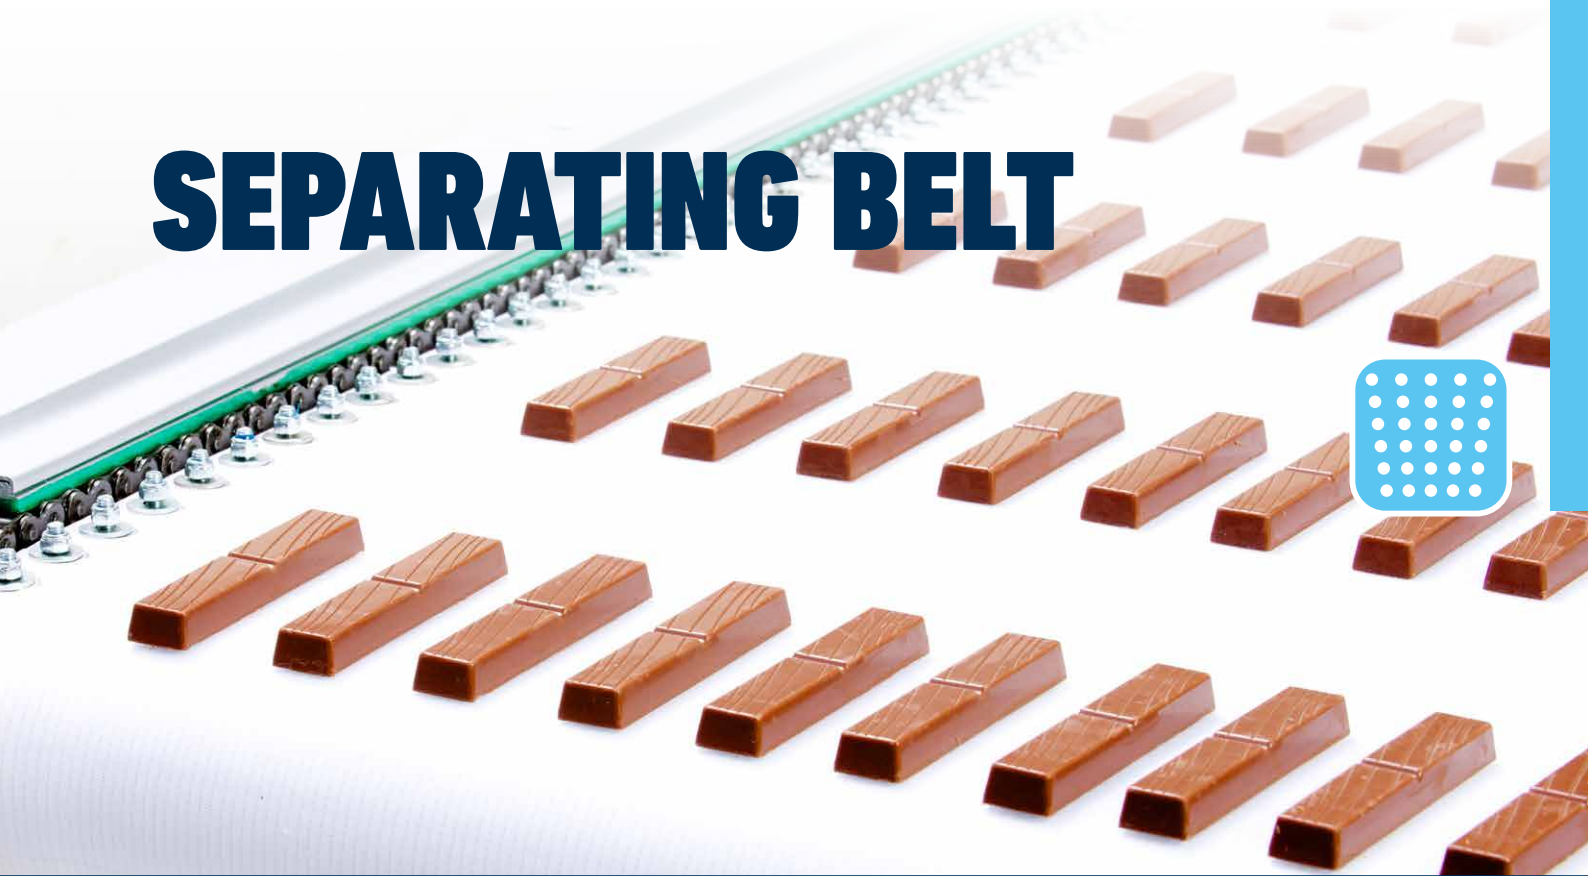


Our high-quality separating belts are capable of transporting as many rows of products as the user needs. The distance between the rows is changed by transverse movement of the separating belt with a special link chain. Another advantage of our separating belts: No refitting is necessary when changing products.

Applications

- For separating or converging products in the production or packaging process
- For transporting small products and bulk goods

Materials used

- Transverse elastic fabric with silicon coating

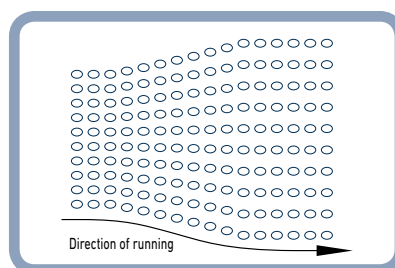

Separation

Dimensions

- Max. belt speed: 25 m/Min
- Max. dimension:
L = approximately 8 000 mm
W = approximately 1 500 mm
- Max. separating range 30 %

Temperature range:

- -10 / +50° C

